

Mostec AG
Mess- und Regeltechnik
Lausenerstrasse 13a
CH-4410 Liestal, Switzerland

Tel. + 41 61 921 40 90
Fax + 41 61 921 40 83
Internet www.mostec.ch
E-Mail info@mostec.ch



Isolation amplifier 1:1 without supply - 1 to 4 channel Type M2931

- 1 to 4 channel versions
- Without power supply
- 17.5mm case
- Plug-in terminals



Technical description

This "snap-on" interface module utilize isolating amplifier channels to galvanically isolate DC current signals without a power supply.

The input current signal can be in the range of 0...27mA. This DC signal is converted to an AC signal, transformed 1:1 to the secondary, rectified and ripple rejected by a filter, thus restoring the original DC current signal.

The small 17.5mm case contains up to 4 separate isolating amplifiers. The output can be on a common mode voltage or on different ground and may feed remote displays, recorders, PLC's analog input, computers and data loggers.

Applications:
Heating, air conditioning, signal isolation, data logging applications etc.

Technical Data:

Input

Input current (I_E):	0...5mA, 0...20mA, 4...20mA, max. 27mA
Max. input current:	50mA with open output
Max. input voltage (U_E):	+20V
Max. voltage drop:	3,7V

Output

Current transfer ratio (I_E : I_A):	1,0 : 1,0
Max. load:	500
Load error:	Typ. 0,1%
Output ripple:	0,9% ($R_L=280 \Omega$, $I_A=20mA$, $f=3,5kHz$)
Rise time:	Typ. 75ms
Working temperature range:	-10...+60°C (max. $\pm 0,1\%/20mA$)


Coupling

Internal oscillator:	Typ. 3,5 kHz
Max. common mode voltage (U_{cmv}):	230VAC RMS, Testvoltage: 2500Veff /1'.
Operating Principle:	The input signal is chopped with 3.5kHz, transformed from the primary to the secondary by a transformer, rectified and filtered. (see block diagram)
Supply current:	None, will be drawn out of the primary signal
CE-Conformity:	fulfilled


Mechanical specifications

Terminals:	12 screw terminals
Terminal description:	Channel1: Input (+) = 1 Input (-) = 2 Output (+) = 9 Output(-) = 10 Channel2: Input (+) = 3 Input (-) = 4 Output (+) = 11 Output(-) = 12 Channel3: Input (+) = 5 Input (-) = 6 Output (+) = 13 Output(-) = 14 Channel4: Input (+) = 7 Input (-) = 8 Output (+) = 15 Output(-) = 16
Dimensions:	W x H x D = 17.5 x 119 x 110mm
Mounting:	35mm mounting rail, EN50022-35
Weight:	130 g
Warranty:	2 years
How to order:	m2931-3 (3 channel) m2931-4 (4 channel) m2931-1 (1 channel) optional, only on request m2931-2 (2 channel) optional, only on request

Diagram:

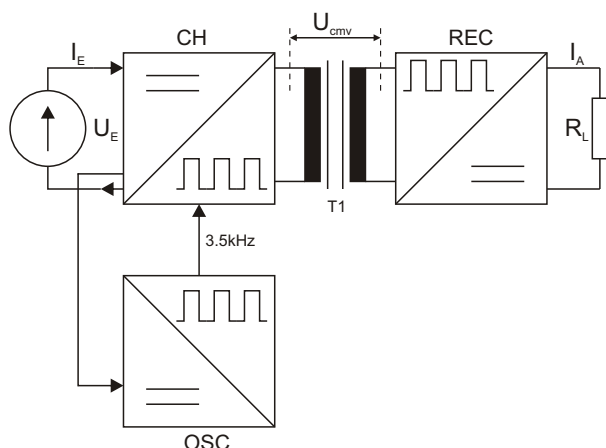

Dimensions:

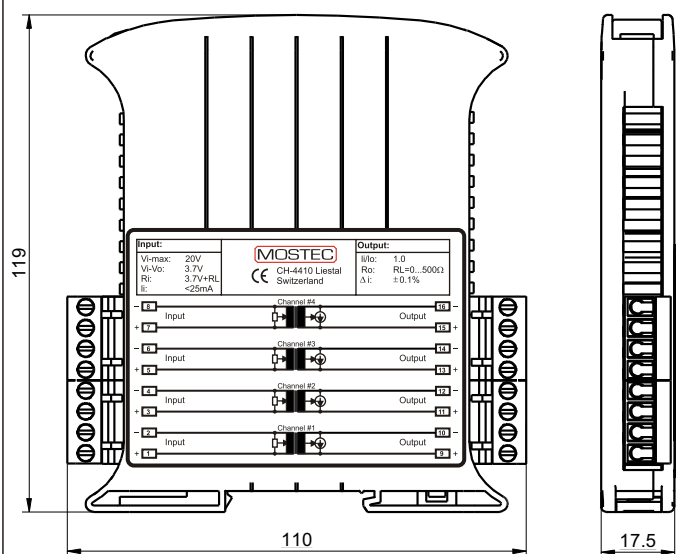

MOSTEC

Mess- und Regeltechnik
 Lausenerstrasse 13a
 CH-4410 Liestal
 Switzerland
 Tel. +41 61 921 40 90
 Fax +41 61 921 40 83